A.HABERKORN
For your safety.

Global
www.globales112.com

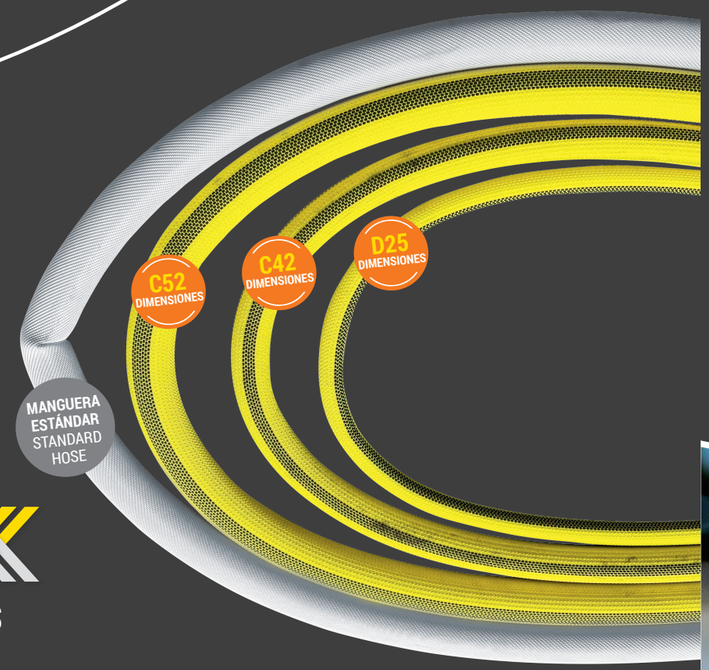


# INTRAX
INTERACTIVE WEAVING TECHNOLOGY

## DATOS TECNICOS ACTUALES
CURRENT TECHNICAL DATA

| | D25 DIMENSIONES | C38 DIMENSIONES | C42 DIMENSIONES | C52 DIMENSIONES |
|---|---|---|---|---|
| **Peso en gr/m**<br>Weight in g/m | 170 | 245 | 270 | 340 |
| **Presión de rotura en bar**<br>Burst pressure in bar | 125 | 100 | 95 | 95 |
| **Presión rotura tras test de abrasión**<br>Burst pressure<br>after abrasion test in bar | 90 | 70 | 60 | 50 |
| **Radio de curvatura en mm**<br>Bending radius in mm | 150 | 170 | 180 | 250 |
| **Nº Certificación DIN**<br>DIN approval<br>Certificate number | | | ZPC 10500 | ZPC 10502 |

Hier geht's direkt
zum neuen INTRAX.

**A.HABERKORN & CO. GMBH**
Werndlstraße 3 • AT-4240 Freistadt
Tel.: +43 79 42 - 77 1 77-0
Fax: +43 79 42 - 77 1 80
E-Mail: textil@a-haberkorn.at
Web: www.a-haberkorn.com

**AGENTE AUTORIZADO A. HABERKORN**
**GLOBAL PROJECTS & SUPPLIES S.L**
C/ Reyes Catolicos 69 Nave 402
Tel.: +34 91 350 2055
Mov: +34 687 63 1515
E-Mail: comercial@globales112.com
Web: www.globales112.com

# INTRAX
INTERACTIVE WEAVING TECHNOLOGY

## INNOVACION GENERA SEGURIDAD EN LAS OPERACIONES
INNOVATION CREATES SAFETY IN OPERATION

MADE IN
AUSTRIA

A.HABERKORN
For your safety.

Global
www.globales112.com

# INTRAX
INTERACTIVE WEAVING TECHNOLOGY

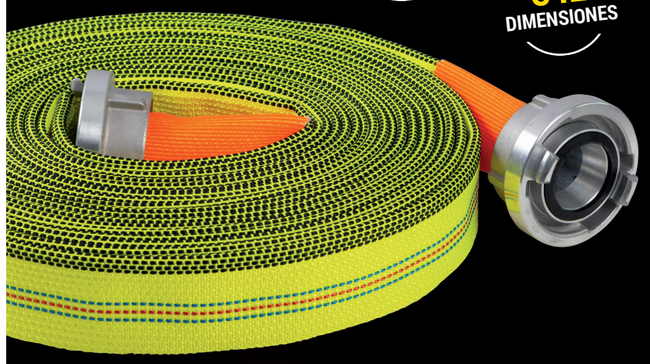


## PEQUEÑO RADIO DE FLEXION/CURVATURA
SMALL BENDING RADIUS

**180 mm**
7 Inches

**12 bar**
at 12 bar

## EXCEPCIONAL PRESION DE ROTURA
EXCEPTIONAL BURST PRESSURE

**95 bar** condiciones originales
95 bar Original condition

**60 bar** tras abrasion
60 bar after abrasion

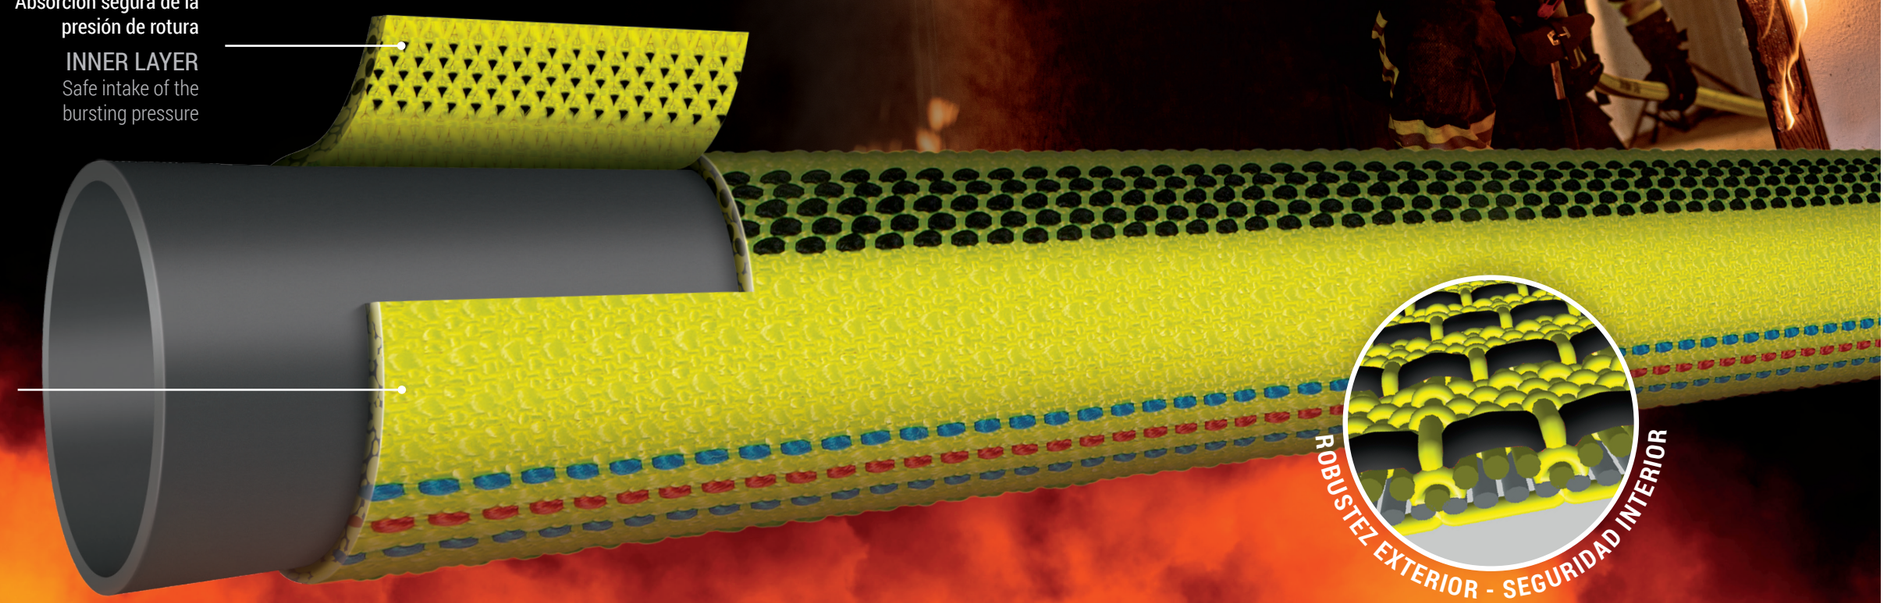


## UNA CAPA, DOS FUNCIONES
### EL PROCESO DE ENTRELAZADO PATENTADO CREA NUEVAS POSIBILIDADES TEXTILES

El enfundado de la manguera de INTRAX hecha de 2 tramas entrelazadas entre sí aumenta la resistencia a la presión y la protección contra cortes y abrasión , siendo tan liviana como una manguera contraincendios convencional. La INTRAX garantiza una protección óptima absorbiendo la presión de rotura a través de la cara interior tejida. Además su estructura de nudos 3D asegura una vida prolongada, máxima seguridad, fácil manejo y una ideal flexión bajo presión.

. ¿Pero qué hace que la INTRAX sea tan única? Su extraordinaria presión de rotura: A 95 bar en su estado original e incluso a 60 bar después de realizar el test de abrasión L3. La INTRAX destaca su ventaja tecnológica sobre otras mangueras contra incendios comparables. Su bajo radio de curvatura: 180 mm a 12 bar hace la INTRAX una segura y fiable herramienta de trabajo incluso en los escenario más complicados.

## ONE LAYER, TWO FUNCTIONS
### PATENTED WEAVING PROCESS CREATES NEW TEXTILE POSSIBILITIES

The INTRAX's hose wall, made of two layers woven into each other, increases abrasion resistance and cut protection and is still lightweight, like a conventional fire hose.
The INTRAX guarantees optimum protection by absorbing the burst pressure at the woven inner layer. In addition, it ensures extended service life, maximum safety, easy handling and ideal gliding properties thanks to the proven 3D nub structure on the outside.

But what makes the INTRAX so unique? Its extraordinary bursting pressure: With 95 bar in its original condition - and even with 60 bar after the successful L3 abrasion test, the INTRAX emphasizes its technological advantage over comparable fire hoses.
The low bending radius - 180 mm at 12 bar - makes the INTRAX a safe and reliable partner even in the most contorted application scenarios.

www.globales112.com

MADE IN AUSTRIA